

Ionpure® MX Low Flow Continuous Electrodeionization (CEDI) Modules

Ionpure® MX Modules — Continuous high-purity water without chemicals



The Ionpure® MX Series modules are designed with proven continuous electrodeionization (CEDI) technology. Performance on these modules has been optimized to produce high purity water for laboratory and smaller scale applications. A wide nominal flow range from 30 – 500 liters per hour increases the applicability for single module installations.

MX Series Features

- Double o-ring seal & housing guarantees leak-free operation
- Superior electrical isolation
- 75 psi (5 bar), 113°F (45°C) continuous operation
- Patented “all-filled” concentrating compartments eliminate recirculation pump and brine injection
- Significantly lower operating costs
- Generate mixed-bed quality deionized water without the use of chemicals
- No need for acid/caustic, neutralization system or exchangable DI tanks
- Continuous production instead of batch, with consistent quality

Ionpure® modules consistently deliver maximum reliability and superior performance for power, HPI/CPI, microelectronics, food and beverage and laboratory applications without regeneration downtime.

For additional information on our MX industrial series of modules call +1 866.876.3340 or visit our website at www.ionpure.com.

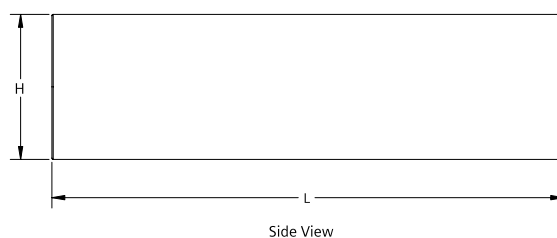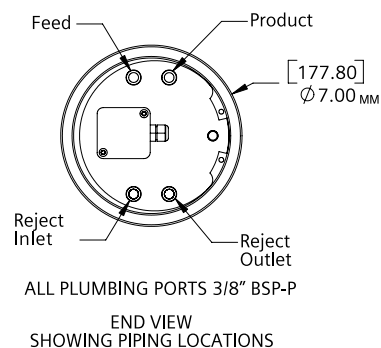

Data Sheet

Ionpure® MX Low Flow Continuous Electrodeionization (CEDI) Modules

Electrical Requirements

Maximum module requirements are 200, 400, 600 VDC, 2.5 Amps.

Operating Environment

Installation should be indoors with no direct sunlight and should have a maximum ambient room temperature 113°F (45°C).

Quality Assurance Standards

CE marked. Each module is factory tested to meet strict Siemens and industry standards and is manufactured in an ISO 9001 and ISO 14000 quality and environmental management system.

Physical Specifications

Item Number	Dimensions	
	L	C
MX30	7.25" (18.41 cm)	7.0" (17.78 cm)
MX60	8.83" (21.27 cm)	7.0" (17.78 cm)
MX125	10.77" (27.37 cm)	7.0" (17.78 cm)
MX250	15.45" (39.23 mm)	7.0" (17.78 cm)
MX500	24.79" (62.90 mm)	7.0" (17.78 cm)

Feed Water Specifications	
Feed Water Conductivity Equivalent, including CO ₂ and Silica	< 40 µS/cm
Feed Water Source	RO permeate
Temperature	41 – 113°F (5 – 45°C)
Inlet Pressure	20 – 75 psi (1.4 – 5 bar)
Maximum Free Chlorine (as Cl ₂)	< 0.02 ppm
Iron (Fe)	< 0.01 ppm
Manganese (Mn)	< 0.01 ppm
Sulfide (S ⁻)	< 0.01 ppm
pH	4 – 11
Total Hardness (as CaCO ₃)	< 1.0 ppm
Dissolved Organics (TOC as C)	< 0.5 ppm
Silica (SiO ₂)	< 1.0 ppm

Typical Module Performance

Operating Parameters	
Recovery	90 – 95%
Maximum Feed Pressure	75 psi (5 bar)
Pressure Drop Range at Nominal Flow	10 – 20 psi (0.7 – 1.4 bar)
Maximum Feed Temperature	113°F (45°C)

Product Water Quality	
Product Resistivity	> 16 megohm-cm*
Silica (SiO ₂) Removal	90 – 99%, depending on feed water

*Note: Actual performance may be determined using the IP-Pro projection software available from Ionpure® Systems.

Ordering Details

MX Series Modules					
Item Number	Product Flow min. gpm (lph)	Product Flow Nominal gpm (lph)	Product Flow max. gpm (lph)	Shipping Weight lbs (kg)	Operating Weight lbs (kg)
MX30	.06 (15)	0.13 (30)	0.19 (45)	10 (4.5)	12 (5.4)
MX60	0.13 (30)	0.26 (60)	0.39 (90)	13 (5.9)	15 (6.8)
MX125	0.27 (62.5)	0.55 (125)	0.825 (187)	25 (11)	27 (12)
MX250	0.55 (125)	1.1 (250)	1.65 (375)	45 (20)	47 (21)
MX500	1.1 (250)	2.2 (500)	3.3 (750)	75 (34)	79 (36)

Siemens Industry, Inc.

10 Technology Drive
Lowell, MA 01851

+1 866.876.3340 (tel)

© 2012 Siemens Industry, Inc.

HPS-C-MX.S-DS-0912

Subject to change without prior notice.

Ionpure is a trademark of Siemens, its subsidiaries or affiliates in some countries.

The information provided in this literature contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms and of the contract.